(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau

T LEXES BUILDED I DELAND LEAD BEING BEING BEING FEILE GEBEN GEREN GEREN GEREN GEREN GEREN GEREN GEREN GEREN GE

(43) International Publication Date 25 November 2004 (25.11.2004)

(10) International Publication Number WO 2004/101941 A1

- E06B 9/174 (51) International Patent Classification7: (21) International Application Number: PCT/DK2004/000344 (22) International Filing Date: .14 May 2004 (14.05:2004) (25) Filing Language:
- (30) Priority Data: 14 May 2003 (14.05.2003) DK PA 2003 00738
- (71) Applicant (for all designated States except US): FABER A/S [DK/DK]; Hestehavevej 22, DK-5856 Ryslinge (DK).
- (72) Inventor; and

(26) Publication Language:

- (75) Inventor/Applicant (for US only): RASMUSSEN, Ken [DK/DK]; Skjerbovej 7A, DK-5750 Ringe (DK).
- (74) Agent: PATENT TACTICS; George Brock-Nannestad, Resedavej 40, DK-2820 Gentofte (DK).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: AN ADJUSTABLE MOUNTING BRACKET FOR SUN SCREENS

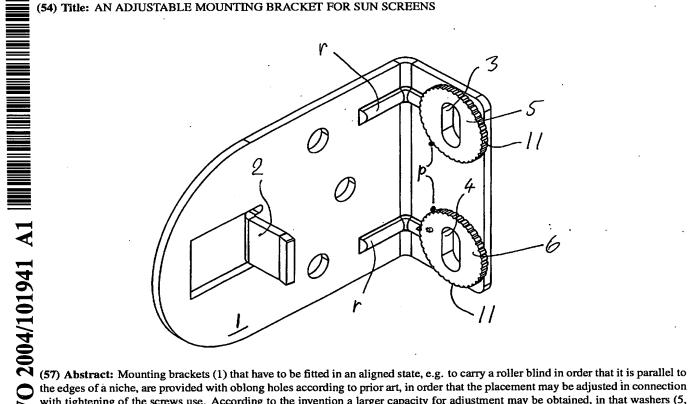

the edges of a niche, are provided with oblong holes according to prior art, in order that the placement may be adjusted in connection with tightening of the screws use. According to the invention a larger capacity for adjustment may be obtained, in that washers (5, 9) with an oblong hole (3) are used, and in that the washes are rotatably fitted in holes (7) in the brackets.

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.